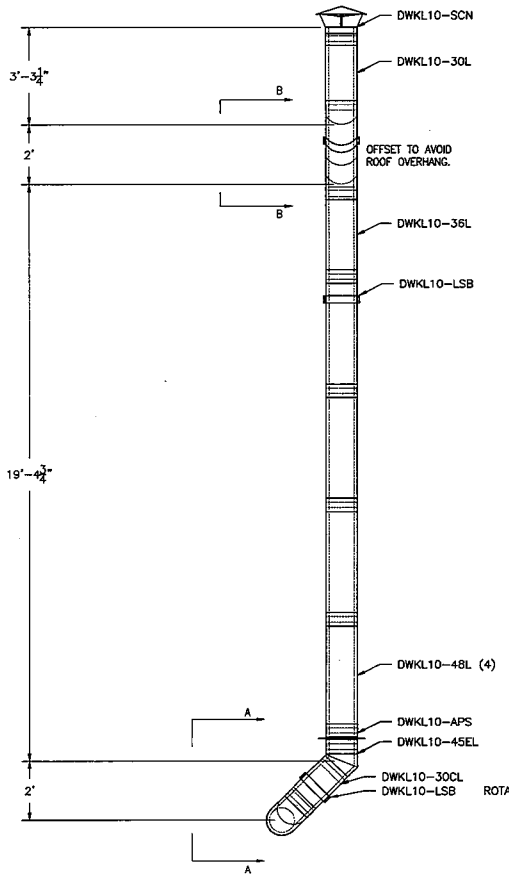

Elevation View



Section View B–B

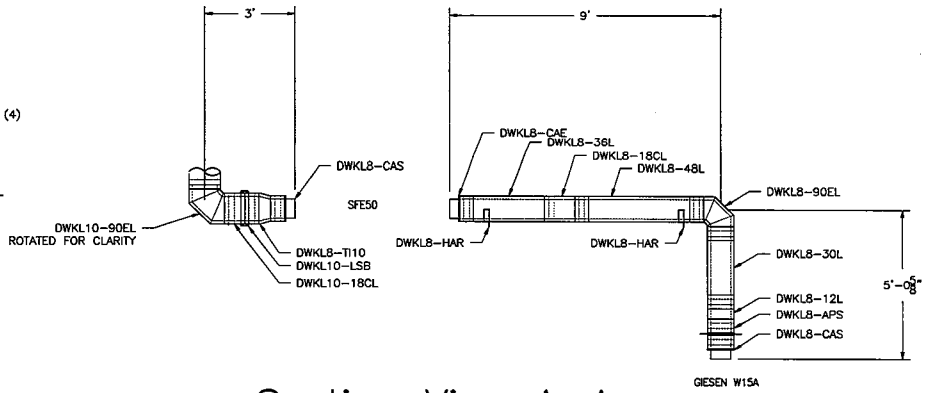

Section View A–A

APPLIANCE MANUFACTURER / MODEL NO.:
GIESEN W15A
OPERATING FLUE GAS TEMPERATURE:
N/A
UL INSTRUCTIONS USED FOR DESIGN:
HPE
UL LABEL USED FOR PRODUCT:
103
KL PASTE FOR CONICAL JOINTS:
3

MATERIAL:
JEREMIAS INC. MODEL DWKL
UL AND cUL LISTED
0.035 " THICK TYPE 444 STAINLESS STEEL INNER
1.25" THICK FIBER INSULATION
0.025" THICK TYPE 430 STAINLESS STEEL OUTER JACKET
TYPE 304 STAINLESS STEEL USED FOR ALL ACCESSORIES

WARRANTY STATEMENT:
THIS PROJECT QUALIFIES FOR THE EXTENDED 25-YEAR LIMITED WARRANTY.

GENERAL NOTES:
1. WHEN INSTALLING FOLLOW ALL APPLIANCE MANUFACTURER AND JEREMIAS INC. INSTALLATION INSTRUCTIONS, AS WELL AS ANY LOCAL OR NATIONAL CODES.
2. INSTALLER IS TO FIELD VERIFY ALL DIMENSIONS AND PARTS BEFORE RELEASING THIS DRAWING FOR PRODUCTION.
3. ALL DRAIN LINES AND SUPPORTS BACK TO THE BUILDING ARE SUPPLIED BY THE INSTALLING CONTRACTOR.
4. JEREMIAS INC. DISCLAIMS ANY RESPONSIBILITY FOR ANY BUILDING INTERFERENCE NOT REFERENCED ON THIS DRAWING.

8 6 4 2 0 Feet

Job: Coffee Roaster

Customer: Frank I. Rounds

jeremias® EXHAUST SYSTEMS

Date: 8.13.2015	DWG: JI–CoffeeRooster	Scale: 1/4"=1'
PO# 0000000	Drawn by: CER	Sheet: 1 of 1